
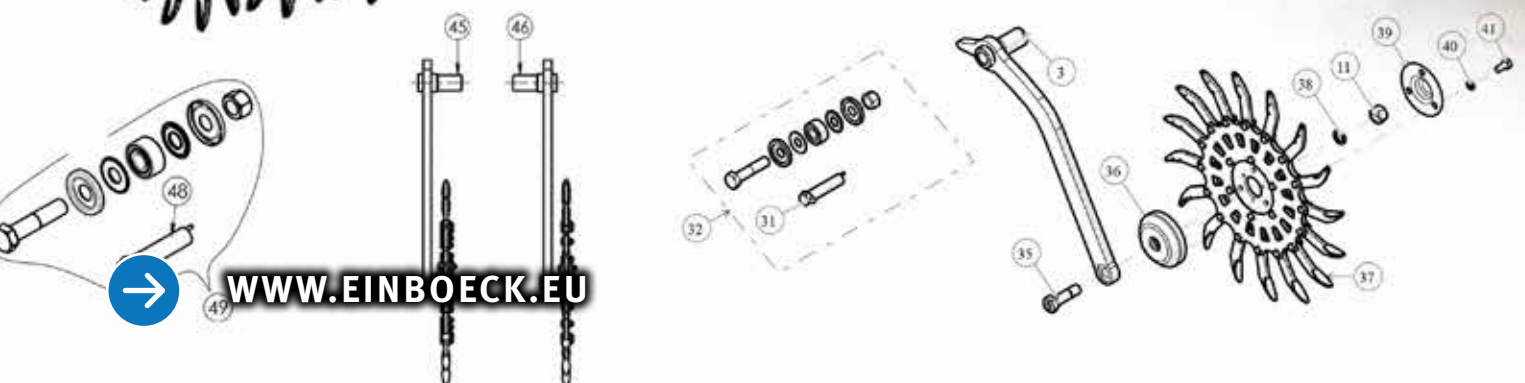


Einböck

**When crop-care
is joy!**

DATA SHEET ROTARY HOE ROTARYSTAR

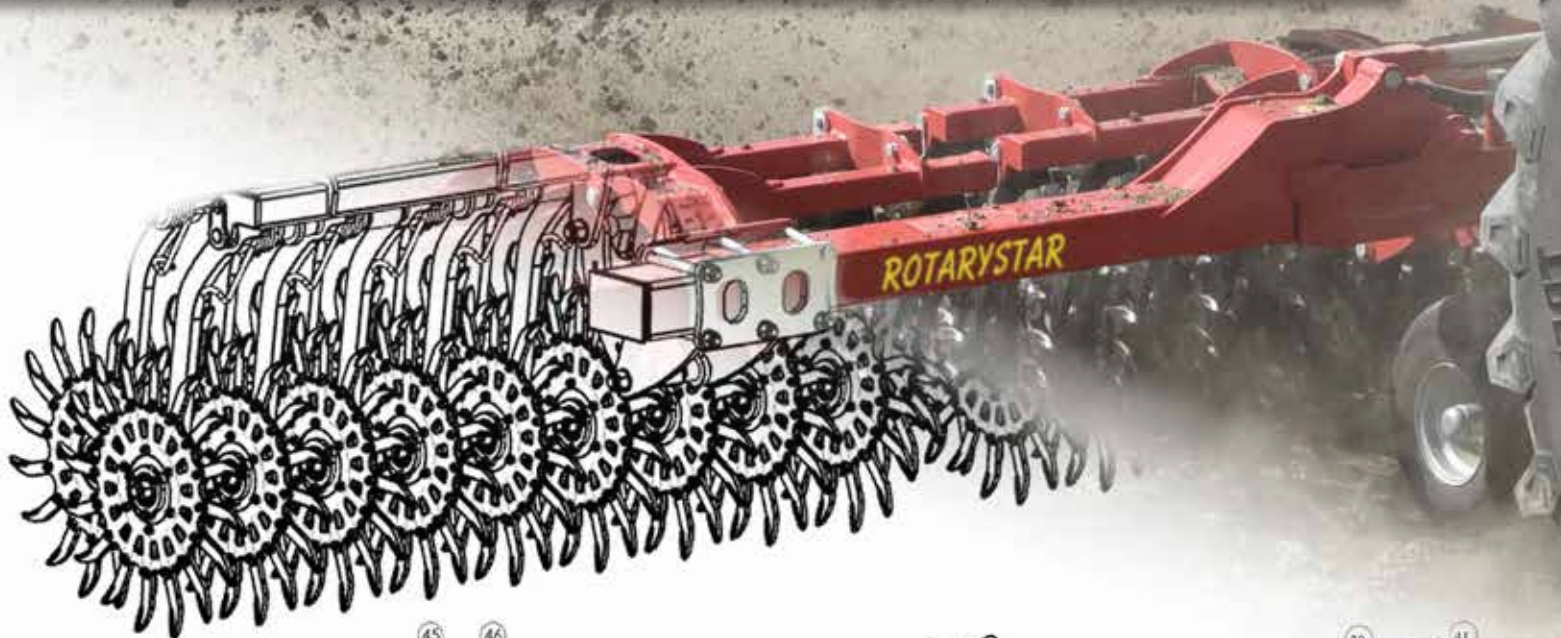

WWW.EINBOECK.EU

DIMENSIONS AND TECHNICAL DATA								FOLDING			EQUIPMENT								ACCESSORIES					
Type	Model = Working width (cm)	Transport width (cm)	Parking height (cm)	Basic weight (approx. in kg)	Standard track width (approx. in cm)	Mounting category	Power requirement from HP/kW	Rigid	Hydraulically folding	Hydraulic valve (double acting)	Stone protection	Support wheels	2-reihige Rotorssternanordnung	Rotary stars	Star tips	Star tips per rotary stars	Number of springs & -size (cm)	Parallel guided rotary stars	Parking position	Clips for sensitive working	Reinforced bearings for large scale farms and working in hilly	Warning signs + LED-lights backward	Warning signs + LED-lights back – and forward	Seeder P-BOX-STI
ROTARYSTAR	300	300	<200	990	122-258	II/28	70/51	✓	-	1	✓	2	✓	32	512	16	2x150	✓	✓	●	●	●	●	●
	340	342	<200	1080	122-258	II/28	70/51	✓	-	1	✓	2	✓	36	576	16	2x169	✓	✓	●	●	●	●	●
	500	275	266	1600	140-145 185-208	II/28	80/59	-	3x	2	✓	2	✓	54	864	16	3x169	✓	✓	●	●	●	●	●
	600	300	303	1820	122-230	II/28	90/66	-	3x	2	✓	2	✓	64	1024	16	4x150	✓	✓	●	●	●	●	●
	640	300	322	1910	122-230	II/28	90/66	-	3x	2	✓	2	✓	68	1088	16	2x169 2x150	✓	✓	●	●	●	●	●
	900	675	402	3600	204-506	III/36	160/118	-	3x	2	✓	4	✓	96	1536	16	6x150	✓	✓	●	●	●	●	-
		300	398	3100	177-242	III/36	160/118	-	3x	2	✓	4	✓	96	1536	16	6x150	✓	✓	●	●	●	●	-
	1200	675	402	4400	204-506	III/36	200/147	-	3x	2	✓	4	✓	128	2048	16	8x150	✓	✓	●	●	●	●	-
		300	398	3915	177-242	III/36	200/147	-	5x	1*	✓	4	✓	128	2048	16	8x150	✓	✓	●	●	●	●	-

✓ = standard equipment

● = optionally available

- = not possible

* With electrohydraulic sequence control (12 VDC socket is required)